

ULTRA 4

Non-contacting ultrasonic level control & flow measurement.

Offering On-Screen Trend Monitoring in a Compact, Cost-Effective Package

Ultra 4 offers the sophistication and advanced features of the rest of the Ultra range in a compact, cost-effective package and useful features that make it even easier to set up and fine-tune.

Offering as the name suggests, four alarm or control relays (3 x SPCO isolated and 1 x SPNO solid state) and a multi-functional display while losing none of the easy setup and configuration that has made the Ultra range of controllers the natural choice for non-contacting measurement worldwide.

Features & Benefits

Like the rest of Pulsar Measurement's 'transducer plus controller' ranges, Ultra 4 is compatible with both dB Ultrasonic and dBR Radar transducers. The unit can be either wall or fascia mounted, allowing it to be used in a wide range of applications all over the world.

Communications & Data Logging

Ultra 4 includes HART, Profibus, and Modbus RTU digital communication options, enabling high accuracy, non-contacting measurement with communications in one multifunctional controller.

The convenience of an on-board micro SD card slot for extended data logging makes storing, accessing, and analyzing data that little bit easier.

Three Different Device Settings in One Convenient Controller

The Ultra 4 from Pulsar Measurement can dedicate the functionality of the unit to any of three specific duties e.g. Level or Volume measurement, Pump Control, or Flow measurement. Despite its high specification and ability to combine these measurements, the Ultra 4 has been designed so that blending



THE RIGHT METER FOR

- Pump Control
- Open Channel Flow & Level
- Chemical Dosing
- IBC Tank Level
- Storage Tank Levels
- CSO & Sewer Network Monitoring

these functions does not lead to complicated calibration and a compromise to the product specification.

Functional Qualities

The controller sends a transmit pulse to the transducer, which emits an ultrasonic pulse or radar signal — as this controller is compatible with BOTH radar and ultrasonic, it doesn't matter which transducer you choose. This signal is perpendicular to the transducer face and the returned echo is sent back to the Ultra 4. The time taken to receive the echo is measured and the distance from the transducer face to the surface being monitored is calculated.



Ultra 4 Fascia Unit

The unit can measure from zero to 40 m (131.2 ft) from the face of the transducer to the surface being monitored, dependent on your application, and your chosen transducer.

Relays

The relays can be programmed to activate alarms, pump starters, or other control equipment. There is an isolated 4-20mA output that can be connected to a recorder or PLC, to monitor, depending on your chosen application. Level, space, distance, OCM head, OCM flow, or volume can be set up independently from that shown on the display. There is an RS232 port so that the Ultra 4 can be operated remotely by a PC or other equipment.


Four user-definable relays are available with individual setpoints and intelligent performance logging software features ensure that you have maximum control versatility over your application.

Ultra 4 Programming


The Ultra 4 can be programmed either by the built-in keypad (comes as standard on all wall and fascia units), via the SD card slot or by PC via the RJ11 Serial Interface. All parameters are stored in non-volatile memory, so are retained in the event of a power interruption. A second backup copy of all parameters can also be retained in the Ultra 4 memory, in case an alternative set of parameters needs to be stored.

The Main Screen

Ultra 4 allows the onboard relays to be configured to a choice of 4 behaviors. The bar graph to the left-hand side of the screen indicates level, as well as a percentage, is shown underneath.

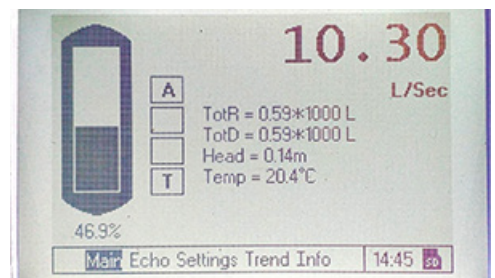


Ultra 4 Main Screen and Bar Graph

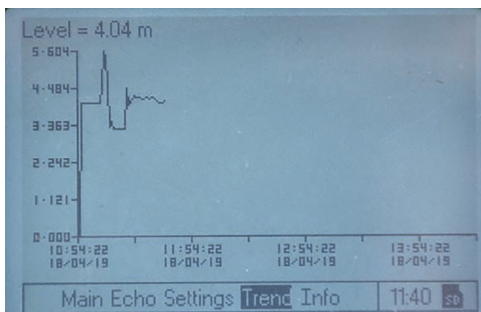

Trend Screen

The trend screen shows you at a glance how levels have varied over time. The unit is supplied complete with an 8GB Micro SD Card to increase its data logging capacity. Giving you complete visuals on stock and level measurement.

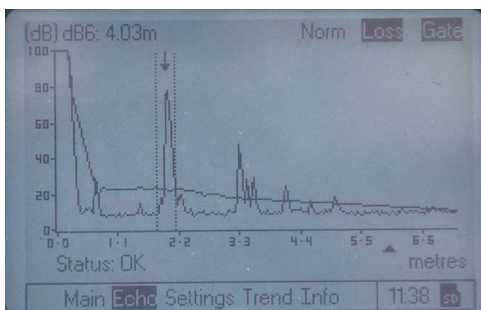

Echo Screen

This screen displays the echo profile without the need to plug into an external device. Pulsar Measurement's unique DATEM software is without equal in identifying and isolating the target, but the echo profile can help in fine-tuning and improving your measurement.

Digital Adaptive Tracking of Echo Movement (DATEM)

The system of Ultra 4 utilizes the unique DATEM software, a proven digital mapping technique developed especially for the Pulsar Measurement Ultra range of controllers. This gives the system unequaled ability when identifying the 'true target level' in the face of competing echoes from pipes, pumps, or other obstructions. Couple with the powerful, long-range abilities of the dB transducer range, the Ultra 4 lives up to its reputation as the most reliable ultrasonic level measurement system available.

The Ultra 4 ultrasonic level controllers have been designed to provide the maintenance-free fit and forget performance.

Technical Specifications

PHYSICAL: MOUNTING OPTION SPECIFIC

Mounting Option:	Standard Wall Mount:	Fascia Mount:
Controller Body Dimensions:	150 mm x 130 mm x 63.5 mm (5.9 in x 5.1 in x 2.5 in)	160 mm x 180 mm x 63 mm (6.3 in x 7.1 in x 2.5 in)
Weight:	Nominal 700 g (1.5 lb)	Nominal 700 g (1.5 lb)
Enclosure Material/Description:	Polycarbonate, flame resistant to UL94-V0	Polycarbonate, flame resistant to UL94-V0
Cable Entry Detail:	3 x M20 glands	
Transducer Cable Extensions:	3-core Screened	
Maximum Separation:	1,000 m (3,280 ft), 500 m (1,640 ft) for dBR16 & dBR8	

ENVIRONMENTAL

IP Rating:	IP67/NEMA 4X (Standard), IP64 (Fascia)
Max. & Min. Temperature (Electronics):	-20 °C to +45 °C (-4 °F to +113 °F)
Flammable Atmosphere Approval:	Safe area compatible with approved approved sensors/transducers. See sensor/transducer spec sheet
UV Rating:	UL746C F1
CE Approval:	See EU Declaration of Conformity
UL Approval:	UL Listed. UL Listed to Canadian Safety Standards. Certificate Number E257330

PERFORMANCE

Accuracy:	±0.25% of the measured range or 6 mm (0.2 in), whichever is greater ±2 mm (0.01 in) for dBR16 mmWAVE RADAR
Resolution:	±0.1% of the measured range or 2 mm (0.08 in), whichever is greater
Max Range:	Dependent on application and transducer (maximum 40 m (131.2 ft) dB40)
Min Range:	Dependent on application and transducer (minimum zero dBMACH 3)
Rate Response:	Fully Adjustable

PROGRAMMING

On-board Programming:	By integral keypad
PC Programming:	Via Integral RJ11 port on unit, or via SD Card slot
Programming Security:	Via passcode (user selectable and adjustable)
Programmed Storage:	Via non-volatile memory
Data Logging & Removable Storage:	Via Micro SD card slot or internal 10-day totaliser logs (flow only)
SD Card Memory (Included):	8 GB

ECHO PROCESSING

Description:	DATEM (Digital Adaptive Tracking of Echo Movement)
Technologies:	Ultrasonic and FMCW RADAR

OUTPUTS


Analog Output:	Isolated (floating output (to 150 V) of 4-20mA or 0-20mA into 1 kΩ (user programmable and adjustable)
Digital Output:	Half Duplex RS232
Volt-free Contacts, Number, & Rating:	3 x SPCO isolated relays, rated at 5A at 250 V AC and 1 Solid state SPNO isolated relay, rated 30 V at 100 mA, suitable for pulse counter applications
Display:	Monochrome graphical dot-matrix, 160 x 240 pixels. Fully programmable display options with integral keypad with menu navigation keys. Program/run/test mode indicators

SUPPLY


Power Supply:	100-240 V AC 50/60 Hz. DC 10-28 V
Power Consumption:	AC = 20 VA MAX, DC = 10 W max
Fuses, Mains:	1A 'T' 20 mm (0.8 in) ceramic 1500A breaking
Fuses, Transducer:	100 mA barrier type, 4000A breaking

COMMUNICATIONS (OPTIONAL)

Modbus RTU/ASCII:	Isolated RS485
Profibus DPV1:	Isolated RS485
HART 7:	Isolated 4-20mA
DNP3/WITS:	Gateway interface (pending)

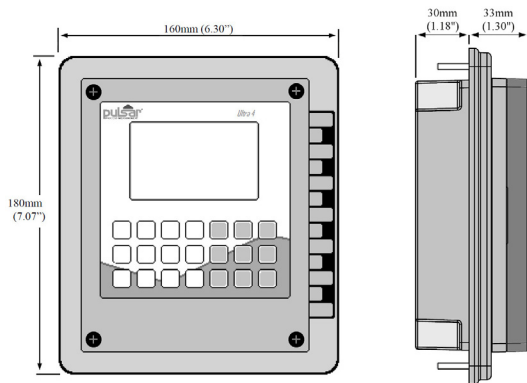

Ultra 4 fascia mount drawing front and side

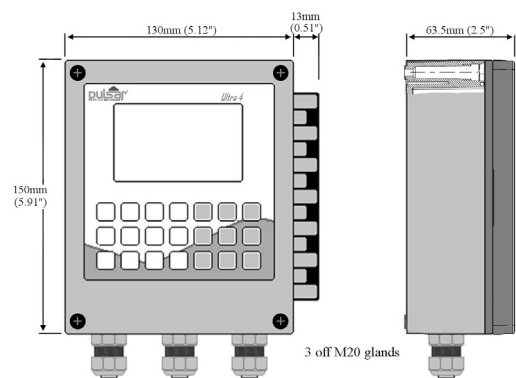

Ultra 4 wall mount drawing front and side

Delivering the Measure of Possibility

Pulsar Measurement offers worldwide professional support for all of our products, and our network of global partners all offer full support and training. Our facilities in Malvern, UK and Largo, USA are home to technical support teams who are always available to answer your call or attend your site when required. Our global presence, with direct offices in the UK, USA, Canada, and Malaysia allow us to create close relationships with our customers and provide service, support, training, and information throughout the lifetime of your product.

For more information, please visit our website:

www.pulsarmeasurement.com



INFO@PULSARMEASUREMENT.COM

Pulsar Measurement is a trading name of Pulsar Process Measurement, Ltd.

*Copyright © 2020 Pulsar Measurement
Registered Address: 1 Chamberlain Square CS, Birmingham B3 3AX
Registered No.: 3345604 England & Wales*

United States
11451 Belcher Road South
Largo, FL 33773
+1 888-473-9546

Canada
16456 Sixsmith Drive
Long Sault, Ont. K0C 1P0
+1 855-300-9151

United Kingdom
Cardinal Building, Enigma
Commercial Centre
Sandy's Road, Malvern WR14 1JJ
+44 (0) 1684 891371

Rev 3.0